




FTC Series Rotary Tillers

36, 40, and 48 Inch Rotary Tillers

Perfect for Sub-Compact Tractors up to 25 HP

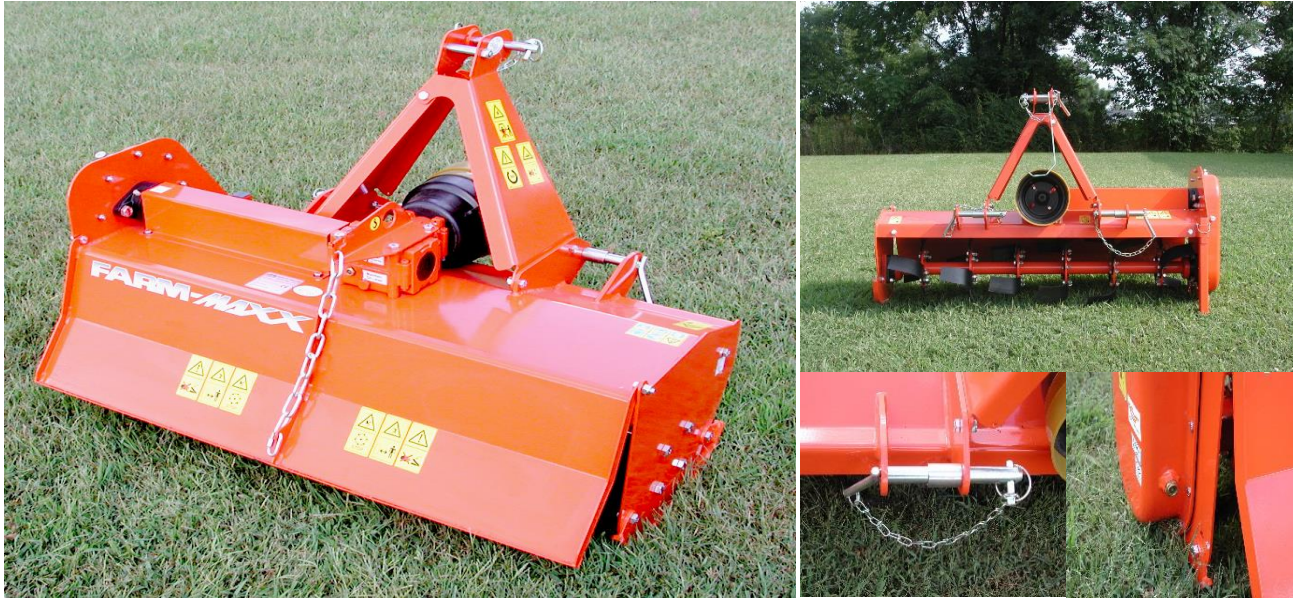

The FTC Series provides the perfectly designed rotary tillers for serious gardeners and those operating sub-compact and compact tractors. These well-built tillers guarantee dependable service and top notch results year after year.

Standard Features Include:

- Six tines per flange on FTC 48, four tines per flange on FTC 36 and 40
- Drive Housing Oil Level Sight Glass for Ease of Maintenance
- Heavy Duty Zinc Plated Jack Stand
- Shear bolt PTO

Options Include:

- Slip Clutch PTO

Specifications	FTC 36	FTC 40	FTC 48
Working Width (Inches)	36	40	48
Working Depth (Inches)	4.75	4.75	4.75
Blades per Flange	4	4	6
Total Blades	16	20	36
Transmission Type	Chain	Chain	Chain
Driveline Protection	Shear Bolt	Shear Bolt	Shear Bolt
Optional Driveline Protection	Slip Clutch	Slip Clutch	Slip Clutch
Hitch	Cat. I	Cat. I	Cat. I
PTO Power Recommended (HP)	13-17	15-20	20-25
Optimum PTO Speed (RPM)	540	540	540
Rotor Tube Diameter (Inches)	2	2	2
Aproximate Weight (LBS)	253	275	297



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com

FARM-MAXX

FTL, FTM, and FTH Series Rotary Tillers Dependable Rugged Gear Drive Performance From 36 to 84 Inches



Built tough for years of dependable, top notch service, Farm-Maxx Gear Drive Rotary Tillers are popular with professional landscapers, gardeners, hunters, small farmers, and many other demanding users. 5 models are offered from 36 to 84 inches. All feature heavy duty gear drive transmissions for rugged reliable performance year after year.

Specifications	FTL-36G	FTL-48G	FTL-60G	FTM-65G	FTM-72G	FTH-84G
Working Width(in.)	36	48	60	65	72	84
Working Depth(in.)	7	7	7	8	8	8
Blades/Flange	6	6	6	6	6	6
Total Flanges	4	6	7	8	9	9
Total Blades	24	36	42	48	54	54
Transmission	Gear	Gear	Gear	Gear	Gear	Gear
Hitch	ASAE Cat I	ASAE Cat I	ASAE Cat I	ASAE Cat I	ASAE Cat I	ASAE Cat I/II
Quick Hitch Compatible	Yes	Yes	Yes	Yes	Yes	Yes
PTO W/ SLIP CLUTCH	Yes	Yes	Yes	Yes	Yes	Yes
PTO SERIES	4	4	4	4	4	5
PTO Power Required (HP)	15-25	25-35	25-40	30-55	30-55	35-70
Optimum PTO Speed (RPM)	540	540	540	540	540	540
Rotor Speed (RPM)	245	242	242	241	241	241
OffSet L+R 4"	Yes	Yes	Yes	Yes	Yes	Yes
Rotor Swing Diameter(in)	14.8	14.8	14.8	17.1	17.1	18.9
Weight W/PTO LBS	392	454	496	682	738	1062

- ASAE Quick Hitch Compatible Welded Hitch
- Boron Steel Tines for Long Life
- Heavy Duty Zinc Plated Jack Stand
- Heavy Drag Board with Zinc Plated Check Chains
- Adjustable Lower Hitch Blocks

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com

FARM-MAXX

Rear Discharge 3 Spindle Grooming Mowers 20-50 HP Models from 48" to 84"



Model	FMR-48	FMR-60	FMR-72	FMR-84
Working Width (Inches)	48	60	72	84
Horsepower	15-50	20-50	20-50	20-50
Weight (LBS)	472	519	574	682
PTO Series	4	4	4	4
Deck Material Thickness	7 Gauge	7 Gauge	7 Gauge	7 Gauge
Blades	3	3	3	3
Belts	2	2	2	2
Hitch Cat.	Cat I	Cat I	Cat I	Cat I
Adjustable Lower Links	Standard	Standard	Standard	Standard
Cutting Height (Inches)	3/4 to 4 1/3	3/4 to 4 1/3	3/4 to 4 1/3	3/4 to 4 1/3
Anti Scalp Roller / Front	Standard	Standard	Standard	Standard
Tires (Hard)	10" x 3.25"	10" x 3.25"	10" x 3.25"	10" x 3.25"
Dimension LxWxH (Inches)	54 x 53 x 30	64 x 58 x 30	76 x 60 x 30	89 x 68 x 30



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com

FARM-MAXX

FFM Series Heavy-Duty Flail Mower Dependable Rugged Performance From 48 to 87 Inches




Model	FFM-120	FFM-160	FFM-175	FFM-205	FFM-220
Working Width (Inches)	48	63	69	79	87
Horsepower	25-60	25-60	30-60	30-60	30-60
Weight	720	933	981	1087	1140
Rotor Speed (RPM)	2,083	2,083	2,083	2,083	2,083
PTO Series	5	5	5	5	5
Hammers	14	22	24	26	28
Rake Tines	7	10	11	13	14
Belts	4	4	4	4	4
Hitch Cat.	Cat I & II	Cat I & II	Cat I & II	Cat I & II	Cat I & II
Manual Side Shift	N/A	Standard	Standard	Standard	Standard
Hyd. Side Shift	N/A	Optional	Optional	Optional	Optional
Adjustable Skids	Standard	Standard	Standard	Standard	Standard
Driveline Protection	Overrun	Optional	Optional	Optional	Optional
Rear Roller	Standard	Standard	Standard	Standard	Standard

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893
Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997
Email: sales@unifarm.biz Website: www.unifarmmachinery.com

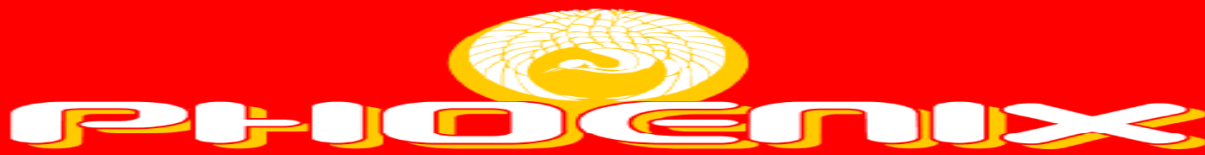

T4 Series Rotary Tillers

40 OffSet, 48, and 59 Inch Rotary Tillers

Quality and Performance at an Affordable Price



The Phoenix T4 family of rotary tillers are perfect for the independent weekend gardner or horticultural enthusiast that likes to do things for themselves. No worries about these tillers, they are built for dependable trouble-free performance year after year.

Standard Features Include:

- 6 Tines Per Flange for Smooth Tilling with Less Power
- Two Position and Adjustable/Off Setable Lower Hitch Blocks (for up to 4" of offset)
- Adjustable Skids
- Heavy Duty Castings and Bearings with Double Lip Seals.
- Powder Coat Paint Finish Available in Red Or Orange
- Heavy Duty Adjustable Drag Board With Zinc Plated Check Chain
- Standard Eurocardan Series 4 PTO Shaft With Slip Clutch
- Quick Hitch Compatible

Specifications	T4-40OS	T4-48	T4-59
Working Width (Inches)	40	48	59
Working Depth (Inches)	7	7	7
Blades per Flange	6	6	6
Scroll Diameter (Inches)	15.7	15.7	15.7
Total Blades	24	30	36
Rotor Flange Thickness	3/8	3/8	3/8
Rotor Speed (RPM)	250	250	250
Drive Chain	#60	#60	#60
Driveline Protection	Slip Clutch	Slip Clutch	Slip Clutch
Hitch	Cat I	Cat I	Cat I
PTO Shaft Series	4	4	4
PTO Power Required (HP)	15-30	15-30	15-30
Optimum PTO Speed (RPM)	540	540	540
Approximate Weight (LBS)	308	335	360

* Uniform reserves the right to change specifications without notice.



For more information contact:

Uniform Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@uniform.biz Website: www.uniformmachinery.com



T5 Series Rotary Tillers

36 to 60 Inch Rotary Tillers so good you hate to get them dirty!



Phoenix T5 Series Rotary Tillers are well suited for hobby farmers, fruit and vegetable growers, landscapers nurseries, vineyards, and grounds maintenance operations. Applications include: soil conditioning and weed control, fertilizer incorporation, and seed bed preparation. Available in working widths from 36" to 60"

Standard Features Include:

- Six Tines Per Flange
- Adjustable/Off Setable Lower and Upper Hitch Blocks (for up to 4" of offset)
- Drive Housing Oil Level Site Glass for Ease of Maintenance
- Multi-position Heavy Duty Zinc Plated Jack Stand
- Powder Coat Paint Finish Available in Red Or Orange
- Heavy Duty Adjustable Drag Board With Zinc Plated Check Chain
- Series 4 PTO Shaft With Slip Clutch

Specifications	T5-36	T5-40	T5-44	T5-48	T5-52	T5-56	T5-60
Working Width (Inches)	36	40	44	48	52	56	60
Working Depth (Inches)	7	7	7	7	7	7	7
Blades per Flange	4	6	6	6	6	6	6
Total Blades	24	30	30	36	36	42	42
Side Drive	#80 Chain	#80 Chain	#80 Chain	#80 Chain	#80 Chain	#80 Chain	#80 Chain
Driveline Protection	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch
Hitch	Cat I	Cat I	Cat I	Cat I	Cat I	Cat I	Cat I
PTO Shaft Series	4	4	4	4	4	4	4
PTO Power Required (HP)	15-20	15-20	15-20	20-35	20-35	20-35	20-35
Optimum PTO Speed (RPM)	540	540	540	540	540	540	540
Rotor Flange Diameter (Inches)	6.3	6.3	6.3	6.3	6.3	6.3	6.3
Rotor Flange Thickness (Inches)	0.4	0.4	0.4	0.4	0.4	0.4	0.4
Approximate Weight (LBS)	300	330	348	363	396	430	441

* Unifarm reserves the right to change specifications without notice.



For more information contact:
 Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893
 Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997
 Email: sales@unifarm.biz Website: www.unifarmmachinery.com



T8 Series Rotary Tillers

Heavy Duty 66" and 74" Rotary Tillers

Quality and Performance at an Affordable Price



The Phoenix T8 family of rotary tillers are perfect for the independent week end gardner or horticultural enthusiast that likes to do things for themselves. No worries about these tillers, they are built for dependable trouble free performance year after year.

Standard Features Include:

- 6 Tines Per Flange for Smooth Tilling with Less Power
- Two Position and Adjustable/Off Setable Lower Hitch Blocks (for up to 4" of offset)
- Adjustable Skids
- Heavy Duty Castings and Bearings with Double Lip Seals.
- Powder Coat Paint Finish Available in Red Or Orange
- Heavy Duty Adjustable Drag Board With Zinc Plated Check Chain
- Standard Eurocardan Series 4 PTO Shaft With Slip Clutch
- Quick Hitch Compatible

Specifications	T8-66	T8-74
Working Width (Inches)	66	74
Working Depth (Inches)	8	8
Blades per Flange	6	6
Scroll Diameter (Inches)	15.7	15.7
Total Blades	24	30
Rotor Flange Thickness	3/8	3/8
Rotor Speed (RPM)	250	250
Drive Chain	#80	#80
Driveline Protection	Slip Clutch	Slip Clutch
Hitch	Cat I	Cat I
PTO Shaft Series	4	4
PTO Power Required (HP)	20-35	20-35
Optimum PTO Speed (RPM)	540	540
Aproximate Weight (LBS)	625	675

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893
 Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997
 Email: sales@unifarm.biz Website: www.unifarmmachinery.com



T10GE Series Gear Drive Rotary Tillers

Tiller Models from 58 to 80 Inches. The Heavy Duty Choice for Demanding Applications



Heavier than the T5 Series, the T10 Series Gear Drive Rotary Tillers from Phoenix are made to fit tractors from 30-50 horsepower. Heavy duty gear drive transmissions on these units guaranty years of trouble free operation under the most demanding applications.

Standard Features Include:

- Six Tines Per Flange
- Adjustable Upper and Lower Links
- Drive Housing Oil Level Site Glass
- Multi-position Heavy Duty Zinc Plated Jack Stand
- Powder Coat Paint Finish Available in Orange Or Red
- Heavy Duty Adjustable Drag Board W/Zinc Plated Check Chain
- Standard Series 5 PTO With Slip Clutch
- Heavy Duty Construction with Double Torque Tube and Single Piece Welded Center Hitch

Specifications	T10-58GE	T10-66GE	T10-74GE	T10-80GE
Working Width (Inches)	58	66	74	80
Working Depth (Inches)	4-8	4-8	4-8	4-8
Blades per Flange	6	6	6	6
Total Blades	42	48	54	60
Side Drive	Gear	Gear	Gear	Gear
Driveline Protection	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch
Hitch Category	Cat 1	Cat 1	Cat 1	Cat 1
PTO Shaft Series	5	5	5	5
PTO HP Required	35-50	35-50	35-50	35-50
Optimum PTO Speed (RPM)	540	540	540	540
Rotor Flange Diameter (Inches)	6.3	6.3	6.3	6.3
Rotor Flange Thickness (Inches)	0.5	0.5	0.5	0.5
Approximate Weight W/PTO (LBS)	646	679	712	765

* Uniform reserves the right to change specifications without notice.



For more information contact:

Uniform Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893
 Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997
 Email: sales@uniform.biz Website: www.uniformmachinery.com



T15 Series Tillers from Phoenix

Heavy Duty Gear Drive Tillers From 73 to 92 Inches



Phoenix T15 Series Rotary Tillers are built tough! Utilizing an ingenious load bearing box frame construction and oversize transmission components, these tillers offer flawless performance for as long as you need them on the job! Why settle for less when there is Phoenix!

Standard Features Include:

- Six Tines per Flange, (Curved or Square)
- Adjustable Sliding Lower and Upper Links
- Heavy Duty Gear Drive in Oil Bath
- Welded Single Piece Top Hitch Frame
- High Gloss Powder Paint Finish

Optional Equipment Includes:

- Spiked Roller
- Wheel Kit
- Inward Turning End Tine
- Rotor With Knives Instead of Tine



Specifications	T15-72GE	T15-80GE	T15-90GE
Working Width (In.)	73	83	92
Working Depth (In.)	7	7	7
Blades / Flange	6	6	6
Total Blades	42	48	54
Side Drive	Gear	Gear	Gear
Driveline Protection	Slip Clutch	Slip Clutch	Slip Clutch
Hitch	Cat I and II	Cat I and II	Cat I and II
PTO Shaft Series	6	6	6
PTO Power Required (HP)	35-65	35-65	35-65
Optimum PTO Speed(RPM)	540	540	540
Rotor Flange Diameter (In.)	6.3	6.3	6.3
Rotor Flange Thickness (In.)	0.5	0.5	0.5
Approximate Weight W/PTO (LBS)	900	950	1050

* Uniform reserves the right to change specifications without notice.



For more information contact:

Uniform Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893
 Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997
 Email: sales@uniform.biz Website: www.uniformmachinery.com



Phoenix T20 Series Tillers

Four Super Heavy Duty Gear Drive Models from 68 to 90 Inches



T20 Series Rotary Tillers from Phoenix Line assure you years of trouble free performance even under the most demanding applications. The load bearing frame on which the protective hood and transmission are mounted make this machine extremely sturdy. The unique design dramatically reduces the possibility of clogging, even in sticky or wet soil conditions.

Standard Features Include:

- Heavy Duty Series 6 PTO with Heavy Duty Friction Disc Slip Clutch by Eurocardan
- Lateral Gear Drive in Oil Bath.
- 6 Tines Per Flange
- Heavy Duty Adjustable Upper and Lower Hitch Blocks
- Four Drag Board Chains on Two Section Drag Board for Ease of Adjustment
- Oversized Sealed Bearings

Specifications	T20-68GE	T20-72GE	T20-80GE	T20-90GE
Working Width (in.)	68	72	80	90
Working Depth (in.)	7	7	7	7
Blades/Flange	6	6	6	6
Total Blades	42	42	48	54
Side Drive	Gear	Gear	Gear	Gear
Driveline Protection	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch
Hitch	Cat I and II	Cat I and II	Cat I and II	Cat I and II
PTO Shaft Series	6	6	6	6
PTO Power Required (HP)	40-70	40-70	40-70	40-70
Optimum PTO Speed (RPM)	540	540	540	540
Rotor Flange Diameter (in.)	6.3	6.3	6.3	6.3
Rotor Flange Thickness (in.)	0.5	0.5	0.5	0.5
Approximate Weight W/PTO (LBS)	933	977	1021	1212

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com



T25 Series Rotary Tillers

Heavy Duty Tillers from 80 to 100 Inches (70-90 HP)



The T25 Series Heavy Duty Gear Drive Tillers feature an easy change 4 speed gearbox allowing you to set your tiller speed to match field conditions. The load bearing frame on which the gearbox and super heavy duty protective hood are mounted make this machine extremely sturdy for even the most demanding applications. All Phoenix line tillers are specially designed to reduce the possibility of clogging even in wet or sticky soil conditions.

Standard Features Include:

- Series 8 PTO Clutch With 4 Plate Slip Clutch by Eurocardan
- 6 Heavy Duty Tines Per Flange
- 4 Speed Gearbox W/ Shift Lever
- Gear Drive Transmission in Oil Bath
- Double Torque Tube
- Adjustable Upper and Lower Hitch Points.



SPECIFICATIONS	T25-80GE	T25-90GE	T25-100GE
Working Width (in.)	81	91	100
Working Depth (in.)	4-8	4-8	4-8
Blades/Flange	6	6	6
Total Blades	48	54	60
Transmission	Gear Drive	Gear Drive	Gear Drive
Driveline Protection	Slip Clutch	Slip Clutch	Slip Clutch
PTO Shaft Series	8	8	8
PTO Requirement (HP)	70-90	70-90	70-90
Rotor Flange Diameter (in.)	6.3	6.3	6.3
Rotor Flange Thickness (in.)	0.6	0.6	0.6
Approximate Weight W/PTO (LBS)	1341	1396	1451
Rotor Speeds	2+2	2+2	2+2

* Unifarm reserves the right to change specifications without notice.




For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893
 Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997
 Email: sales@unifarm.biz Website: www.unifarmmachinery.com



T30 Series Rotary Tillers

Heavy Duty Tillers from 90 to 120 Inches (90-160 HP)

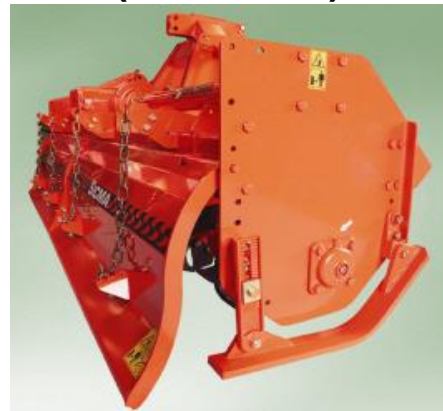

T30 Series Gear Drive Rotary Tillers from Phoenix are extremely reliable and suited to even the most demanding applications and soil conditions. The super strong frame, heavy duty steel plate box-type bonnet, and four speed side drive in oil bath make these heavy duty machines dependable work horses on any job. From the oversized rotor tube with optional double flange to the double extended torque tubes, this machine is built to give you years of trouble free service.

Get the most out of your T30 Series Rotary Tiller with optional Roller Packer Kit, Hydraulic Roller Packer Control Kit, and Double Flanged Rotor Tube.

Standard Features Include:

- Series 8 PTO Clutch With 4 Plate Slip Clutch by Eurocardan
- 6 Heavy Duty Tines Per Flange
- 2+2 Gearbox
- Gear Drive Transmission in Oil Bath
- Double Torque Tube

Available Options on Request:

- Double Flanges
- Roller Packer Kit
- Hydraulic Roller Packer Control Kit
- Spiked Roller Packer Kit

SPECIFICATIONS	T30-90GE	T30-100GE	T30-112GE	T30-120GE
Working Width (in.)	90	100	112	120
Working Depth (in.)	4-8	4-8	4-8	4-8
Blades/Flange	6	6	6	6
Total Blades	54	60	66	72
Transmission	Gear Drive	Gear Drive	Gear Drive	Gear Drive
Driveline Protection	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch
PTO Shaft Series	8	8	8	8
PTO Requirement (HP)	90-160	90-160	90-160	90-160
Rotor Flange Diameter (in.)	6.3	6.3	6.3	6.3
Rotor Flange Thickness (in.)	0.6	0.6	0.6	0.6
Approximate Weight W/PTO (LBS)	2515	2725	2879	3108
Rotor Speeds	2+2	2+2	2+2	2+2

* Uniform reserves the right to change specifications without notice.




For more information contact:

Uniform Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893
 Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997
 Email: sales@uniform.biz Website: www.uniformmachinery.com




Phoenix Reverse Tine Tillers

3 Heavy Duty Gear Drive Models from 60 to 74 Inches

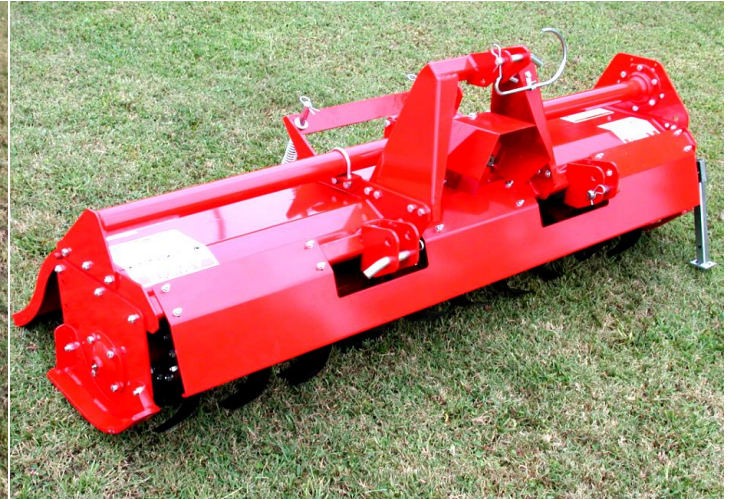

The reverse rotation of our tiller tines forces the tiller down into the ground for deep smooth cultivation while bringing debris up over the top of the rotor. This unique action deposits larger debris first then covers it with finely pulverized soil particles for a smoother, cleaner finish. Get the final results you need in one pass!

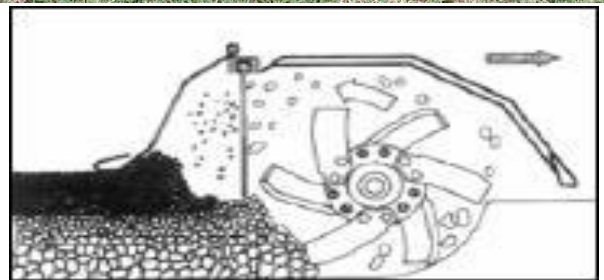

Standard Features Include:

- Series 4 & 5 PTO W/ Slip Clutch by Eurocardan
- 6 Tines Per Flange
- Heavy Duty Drag Board
- Sliding/Adjustable Lower Hitch Blocks
- Heavy Duty Gear Drive Transmission
- Heavy Duty Adjustable Skids with Aprons for Quick Depth Adjustment

Specifications	T5R-60GE	T10R-66GE	T10R-74GE
WORKING WIDTH (Inches)	60	66	74
Working Depth (Inches)	7	4-8	4-8
Blades per Flange	6	6	6
Total Blades	42	48	54
Side Drive	Gear	Gear	Gear
Driveline Protection	Slip Clutch	Slip Clutch	Slip Clutch
Hitch	Cat I	Cat I	Cat I
PTO Shaft Series	4	5	5
PTO Power Required (HP)	20-35	35-50	35-50
Optimum PTO Speed (RPM)	540	540	540
Rotor Flange Diameter (Inches)	6.3	6.3	6.3
Rotar Flange Thickness (Inches)	0.4	0.5	0.5
Aproximate Weight (LBS)	441	679	712

* Uniform reserves the right to change specifications without notice.



For more information contact:

Uniform Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@uniform.biz Website: www.uniformmachinery.com



T12R Series Offsetable Reverse Rotation Tiller



Standard Features Include:

- "Easy Just" Manual Side Shift
- Heavy Duty Gear Box (5 Year Limited Warranty)
- Reverse Tilling Action for One Pass Finish
- #5 Eurocardan PTO W/Slip Clutch
- Removable Front "Easy Service" Rotor Shield
- High Gloss Powder Coat Paint
- Adjustable Skids for Precision Depth Control
- Heavy Duty Drag Board W/Double Down-Pressure Springs
- Adjustable Lower Links

Optional Feature:

- Hydraulic Side Shift

Model	T12R-66GE	T12R-74GE
Working Width (Inches)	66	74
Required Horsepower	30-55	30-55
Weight (LBS)	769	803
Hitch	Cat I	Cat I
Number of Tines	48	54
Overall Length (Inches)	70	78
Tilling Depth (Inches)	4-8	4-8
Maximum Offset (Inches)	22	26
Side Transmission	Gear Drive	

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com



"M" Series 48, 60, 72 and 84" Rear Discharge Grooming Mowers



Phoenix Line "M" Series Rear Discharge Grooming Mowers turn your tractor into a mowing machine. Available in 4 cutting widths from 48" to 84". Choose solid or pneumatic tires depending on your specific requirements. These mowers feature a heavy duty welded one piece deck and three overlapping blades with specially designed baffles for a clean smooth cut and even dispersion of clippings. Available in popular red or orange colors, the powder coat paint finish keeps you machine looking new long after the competition has faded away.

Standard features include:

- Solid or Pneumatic tires on heavy duty wheels with greasable roller bearings
- Series 4 PTO shaft by Eurocardan
- Adjustable lower links with floating or fixed positions
- Front anti scalping roller on 84" models(Available Option on other models) * as shown in photograph
- Floating top hitch for smooth terrain tracking
- One step grease points without removing safety shields

Specifications	M48-A	M48-S	M60-A	M60-S	M72-A	M72-S	M84-A	M84-S
Mowing Width (Inches)	48		60		72		84	
Overall Width (Inches)	50		63		74		86	
Mowing Height (Inches)	.75-4.25		.75-4.25		.75-4.25		.75-4.25	
Number of Blades	3		3		3		3	
Deck Material Thickness (MM/Gauge)	4/8		4/8		4/8		4/8	
Discharge	Rear		Rear		Rear		Rear	
Hitch	Cat 1		Cat 1		Cat 1		Cat 1	
PTO Shaft Series	4		4		4		4	
PTO Power Required (HP)	10-30		20-40		30-50		40-60	
Optimum PTO Speed (RPM)	540		540		540		540	
Blade Tip Speed (FPM)	3130		2650		2240		2030	
Approximate Weight W/PTO (LBS)	392	450	545	580	615	660	850	898
Tire Configuration	Pneumatic	Solid	Pneumatic	Solid	Pneumatic	Solid	Pneumatic	Solid
Anti-Scalp Roller	Optional		Optional		Optional		Standard	
Belt Covers	MDPE		MDPE		MDPE		Metal	

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com



FLXM Heavy Duty Flex Wing Mowers The Next Step in Value and Performance!



FLXM Flex Wing Mowers from Phoenix offer you unsurpassed performance in mowing widths from 12 to 20 feet. Operating ground speeds of up to 10MPH together with superb cut quality mean less time in the field. Wide angle PTO shafts, advanced floating deck/frame linkages, and a combination of fixed and pivoting high flotation wheels give you superb maneuverability and ease of operation even in the most demanding field conditions. Ideally suited for parks, athletic fields, airports, sod farms, golf courses, or other large grassy areas where appearance and quality of cut are critical, these machines will save you time and money year after year.

Standard Features Include:

- Extra Heavy Duty Transport Frame W/Easy Adjust Telescoping Wings
- Double Pivot Floating Hinge Points at Each Deck for Maximum Float and Tracking
- Hydraulic Locking/Unlocking System with Double Acting Cylinders Standard
- Cool and Quiet Running Heavy Duty Gearboxes with Integral Oil Level Sight Glasses
- Series 6 Main PTO Shaft W/CV Joint by Eurocardan is Standard Equipment
- Wing Decks Feature Series 4 Eurocardan PTO Shafts as Standard Equipment
- One Step Spindle Greasing Without Removing Shields
- Four 13" High Flotation Tires Per Deck For Excellent Tracking and Minimum Compaction.
- "No Tools Required" Belt Shield Removal
- Standard Anti Scalping Rollers on Each Deck
- Adjustable Carrier Frame Height Allows for Matching with Multiple Tire and Drawbar Height Combinations.



Model	FLXM-312	FLXM-315	FLXM-317	FLXM-320
Working Width (Feet)	12	15	17	20
Rated Horsepower (Min)	35	40	45	55
Weight (LBS)	3,130	3,264	3,352	4,366
Deck Configuration	48-48-60	60-60-72	72-72-72	84-84-84
Anti-Scalp Roller	Standard	Standard	Standard	Standard
Tire Size	13 x 5.00-6	13 x 5.00-6	13 x 5.00-6	13 x 5.00-6
Cutting Height (Inches)	1" - 5"	1" - 5"	1" - 5"	1" - 5"
PTO (Main)	#6CV	#6CV	#6CV	#6CV
PTO (Wing)	#4	#4	#4	#4
Ground Pressure (Lb/Sq. In)	7.10	7.30	7.70	9.90
Blade Tip Speed (Ft/Min)	13,808	14,113	14,198	15,274
Transport Width	7' 3"	7' 8"	8' 3"	9' 8"
Maximum Width	12' 2"	15' 1"	17' 1"	20'
Maximum Length	14'	15'	15' 9"	16' 5"

* Uniform reserves the right to change specifications without notice.



For more information contact:


Uniform Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com



TE Series Offsetable Flail Mowers At Last You Have A Choice!

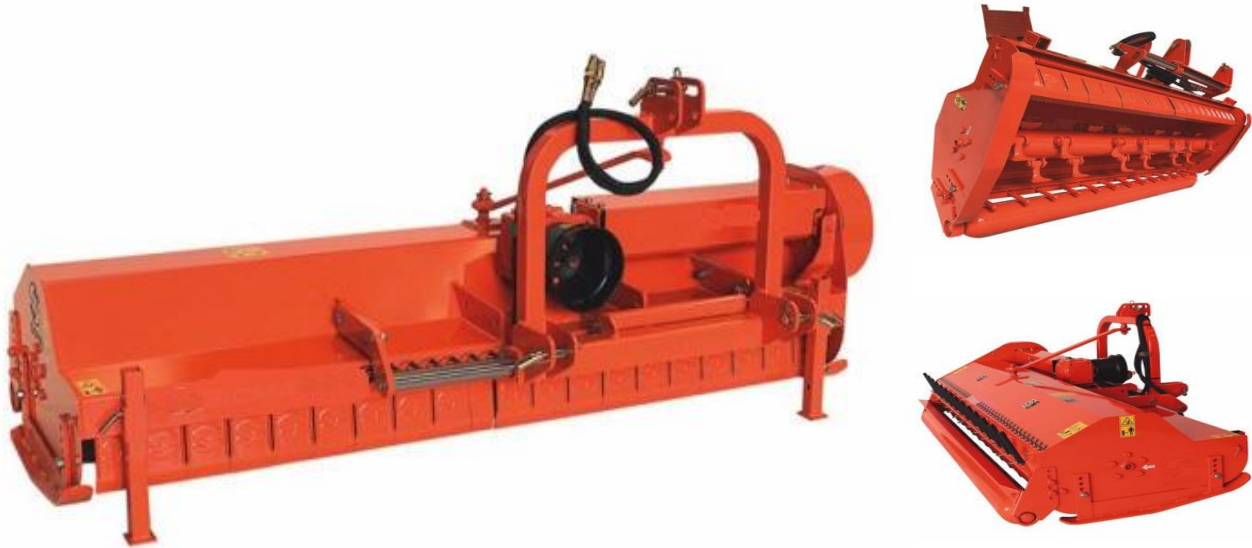

TE Series Flail Mowers from Phoenix offer you two working widths of 79 and 87 inches. These machines are perfect for tractors from 30-60hp. Clean trouble free cutting and shredding are yours.

Standard Features Include:

- Gearbox With Incorporated Overrunning Clutch
- Category I Hitch
- Adjustable Heavy Duty Roller
- Front Debris Guards for Added Safety
- Rear Shredder Tines for Use With Hammers

Optional Features:

- Slicer or Hammer Type Blades
- Hydraulic or Manual Side Shift
- Side Skids

Model	TE-205	TE-220
Working Width (Inches)	79	87
Overall Width	87	94
Horsepower	30-60	30-60
Flails - Slicer/Hammer	52	56
Hammers	26	28
Weight	772	827
Rotor Speed (RPM)	2082	2082
PTO Series	5	5
Driveline Protection	Overrun	Overrun
Belts	4	4
Hitch Cat.	Cat 1	Cat 1
Mech. Side Shift	Optional	Optional
Hyd. Side Shift	Optional	Optional

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893
 Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997
 Email: sales@unifarm.biz Website: www.unifarmmachinery.com



SLE Series Three Point Flail Mowers

At Last You Have a Choice!



Available in working widths of 47 inches, 55 inches, 64 inches, and 74 inches, SLE Series Flail Mowers offer you the dependable performance you need to stay on the job! 40 years of experience go into the making of these machines.

Standard Features Include:

- Quick Hitch Compatible Category I Three Point
- Eurocardan Series 5 Driveline
- 3:1 Ratio Gearbox with Bevel Spiral Gears and Free Wheel
- Double Parking Stand
- No Tool Blade Change (Side Slicing Blades)
- Center or Offset Mounting
- Adjustable Working Height (Roller)
- Standard Multiposition Offsetable Hitch

Available Options:

- Side Skids
- Lateral Shields

Model	SLE-120	SLE-140	SLE-160	SLE-190
Working Width (Inches)	47	55	64	74
Rated Horsepower	20-45	25-45	30-45	35-45
Weight (LBS)	485	530	582	660
Number of Y Blades	44	52	60	72
Number of Ducksfoot	22	26	30	36
Hitch	3 point, I Cat.	3 point, I Cat.	3 point, I Cat.	3 point, I Cat.
Rotor Diameter (Inches)	4.5	4.5	4.5	4.5
Rotor Tube Thickness (Inches)	5/16	5/16	5/16	5/16
Swing Diameter (Inches)	14.6	14.6	14.6	14.6
Rear Roller Diameter (Inches)	5.5	5.5	5.5	5.5
Rotor Speed (RPM)	2,356	2,356	2,356	2,356
Knives Tip Speed (FPM)	8984	8984	8984	8984

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com

FARM-MAXX

FL Series Flail Mowers Economical Performance From 40 to 65 Inches



Model	FL-105	FL-125	FL-165
Working Width (Inches)	41	49	64
Horsepower	20-30	20-35	25-40
Weight (LBS)	287	353	518
PTO	540	540	540
Hammers/Knives	18/36	20/40	26/52
Belts	3	3	3
Hitch Cat.	Cat I	Cat I	Cat I
Adjustable Skids	Standard	Standard	Standard
Driveline Protection	Overrun	Overrun	Overrun
Rear Roller	Standard	Standard	Standard



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893
Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997
Email: sales@unifarm.biz Website: www.unifarmmachinery.com



MM-MA-MLE-MP Ditch Bank Flail Mowers



The Phoenix family of ditch bank flails offer rugged construction for years of dependable service!

Standard Features Include:

- Constant Velocity PTO Shaft
- Hydraulic Flow Control
- Side Skids
- Safety Deflectors
- Full Floating Hitch


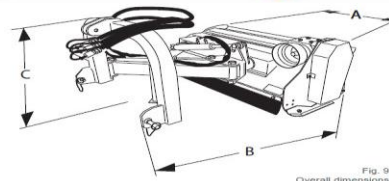


Fig. 9
Overall dimensions



Model	MM-110	MM-125	MA-120	MA-140	MLE-160	MPE-200
A	43"	49"	47"	55"	60"	75"
B	57"	57"	47"	47"	63"	73"
C	33"	33"	28"	28"	38"	41"
D	69"	75"	72"	91"	97"	125"
E	23"	23"	23"	26"	26"	34"
F	57"	57"	57"	61"	61"	71"
G	65°	65°	65°	65°	66°	70°

Model	MM-110	MM-125	MA-120	MA-140	MLE-160	MPE-200
Working Width (Inches)	43"	49"	47"	55"	60"	75"
Req. Horsepower	15-30	15-30	30-70	30-70	50-90	60-130
Weight (LBS)	419	441	551	661	1014	1443
Hitch	Cat I/II	Cat I/II	Cat I/II	Cat I/II	Cat I/II	Cat II/III
Hammers (Knives)	26 (52)	30 (60)	20 (40)	24 (48)	22 (44)	24 (48)
PTO Series	4	4	4	4	6	6
Maximum Offset (Inches)	69"	75"	72"	80"	88"	116"



For more information contact:
 Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893
 Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997
 Email: sales@unifarm.biz Website: www.unifarmmachinery.com

FARM-MAXX

Model MX80-320 and MX80-350 Three Point Cement Mixer



Mix it yourself with the Farm-Maxx MX-80 Three Point Mixer! Designed for easy mounting on your tractors three point hitch, these compact units are made to last! The 10:1 chain drive transmission is easy to access for maintenance and is protected by a heavy duty steel housing. The high gloss epoxy finish is baked on at 302 degrees farenheight for extreme protection even under the most demanding conditions. Charging, dumping, and cleaning, are easy with the large mixer opening.

Standard Features Include:

- Series 1 PTO Shaft by Eurocardan
- Hydraulically Actuated Dumping
- Two Piece Bolt Together Mixer Cone for Ease of Cleaning and Service
- Heavy Duty 10:1 Ratio Chain Drive W/Easy Service Access
- Removeable Hitch Pins

Model	MX80-350
Capacity (US Gal)	92
Weight (LBS)	250
PTO Shaft	1-1/4
Rotation Speed (RPM)	250-300
Transmission Ratio	10:1
Hydraulic Cylinder	Standard

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com

FARM-MAXX

Model CPP-T Single Row Potato Harvester

For Tractors 18 to 25 Horsepower



CPP-T Potato Harvester features a digging depth that conveys the potatoes and soil onto a vibrating sieve grid. This separates the potatoes from the soil and deposits them in an easy to access single cut row.

Perfect for the small producer, the CPP-T Single Row Potato Harvester is a reliable and inexpensive way to get your potato crop out of the field. Optimized for use behind smaller tractors, this unit gently extracts your potatoes from the ground without bruising.

This is a "Must Have" for the organic potato grower, small producer, and serious gardener alike.

Standard Features Include:

- Hardened Long Life Digging Share
- Adjustable and Removeable Gauge Wheels
- Single Lever Depth Adjustment

Model	CPP-T
Rows Harvested	1
Machine Width	36"
Machine Length	52"
Machine Height	34"
Cutting Share Width	19"
Weight (LBS)	285
PTO Shaft	1-3/8 Z6
PTO RPM	540
Acres / Day	3
Min/Max HP	18/25

For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893
Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

FARM-MAXX

Model SPA-T "Baby" Single Row Potato Planter



Model	SPA-T
Rows	1
Machine Width	32"
Machine Length	36"
Machine Height	43"
Hopper Capacity (LBS)	110
Machine Weight (LBS)	210
Ground Drive	Yes
Horsepower Requirement	15
Seeding Distance Settings 10" - 12" - 14" - 16"	

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com

FARM-MAXX

FDM Series Drum Mowers FDM-165, FDM-185, and FDM-210H



FDM Series Drum mowers feature robust durable construction for years of trouble free performance. Their simple robust design boasts one of the lowest power requirements in the industry. The result is low fuel consumption and longer tractor life. Switching from transport to mowing is simple and quick. Impact protection is provided by an automatic breakaway system. High quality swath and clean even cut will satisfy even the most demanding user.

Model	FDM-165	FDM-165H	FDM-185	FDM-185H	FDM-210H
Working Width	66"	66"	73"	73"	83"
Drums	Double	Double	Double	Double	Double
Blades Per Drum	3	3	3	3	4
Quick Change Blades	Standard	Standard	Standard	Standard	Standard
Swath Width	28"	28"	32"	32"	32"
Hitch Category	Cat I/II	Cat I/II	Cat I/II	Cat I/II	Cat I/II
Horsepower Minimum	35	35	40	40	65
Overrunning Clutch Internal	Standard	Standard	Standard	Standard	Standard
Transport Width	60"	60"	78"	78"	78"
PTO	#5	#5	#5	#5	#5
Drum Rotation Speed (RPM)	2,025	2,025	2,025	2,025	1,610
Blade Tip Speed (FPS)	295	295	338	338	295
Safety Breakaway	Standard	Standard	Standard	Standard	Standard
Hydraulic Fold	Optional	Standard	Optional	Standard	Standard
Working Speed (MPH)	9	9	9	9	9
Weight (LBS)	882	901	1,003	1,022	1,234



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893
Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997
Email: sales@unifarm.biz Website: www.unifarmmachinery.com

FARM-MAXX

Models DMD 2250, DMD 2260, and DMD 2270 Disc mowers from Unifarm Machinery Corporation offer you the quality and performance you can depend on!




With working widths from 7' - 6" to 9' - 2" these time tested machines offer you unsurpassed performance and dependability at an unbeatable price. Standard heavy duty Series 5 pto with overrunning clutch, adjustable/removeable hitch pins, extra large bearings specially manufactured for extremely demanding working conditions, forged steel cutting discs, and a proprietary safety release to protect your investment are just a few of the features you normally expect to find

on much more expensive machines. If you are serious about your machinery and want the best, go with the DMD series.



Forged Steel Discs For Even Product Flow and Clean Cutting. Low Profile Bar And Specially Disk Profile Mean Smoother Cut, Reduced Bunching, Lower Horse-Power Requirement. Abrasion Resistant Steel Slides and Stone Guards Mean Less Down Time, Longer Bar Life!

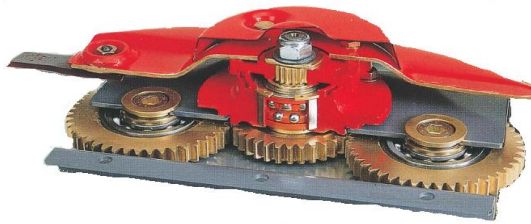

The Entire Bar. The Gear Drive System Turns At Half the Speed of Shaft Drive Systems Meaning Longer Life and Less Down Time for You!

Heavy Duty Heat Treated Gears and Extra Large High Speed Bearings Assure Long Life. Disc Bearings Can Be Removed W/O Dissassembling the

DMD Series Mower Specifications

Model	2250	2260	2270
Discs #	5	6	7
Number of Blades	10	12	14
Working RPM	3080	3080	3080
PTO RPM	540	540	540
Min. Cutting Height	.2"	.2"	.2"
Minimum PTO Required	40HP	43HP	48HP
Max. Mowing Slope - Down (Degrees)	30	30	30
Max. Mowing Slope - Up (Degrees)	90	90	90
Hitch Cat.	Cat I - II	Cat I - II	Cat I - II
Working Width	6' - 8"	7' - 10"	9' - 2"
Transport Width	53"	53"	53"
Machine Width	153"	168"	184"
Machine Length	49"	49"	49"
Machine Height	54"	54"	54"
Machine Weight	1102	1212	1278

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com

FARM-MAXX

Models FSBM-5 MINI, FSBM-5, FSBM-7, FSBM-9 Sickle Bar Mowers From Unifarm Machinery That Offer The Quality and Performance You Can Count On!



Small Hay Operations, Pond and Ditch Bank Mowing? FSBM Series Sickle Bar Mowers from Unifarm are perfectly fitted to your needs. Rugged and simple construction assure years of trouble free performance. Available in manual and hydraulic fold configurations, these mowers are sure to impress!

Features Include:

- Manual or Hyd. Folding
- Double Acting Cutting Bar
- Easy Change "Bolt On" Guards
- + 90 to - 45 Degree Cutting Angle
- Heavy Duty Safety Release
- Extra Blade Bar Included
- Powder Coat Paint



Model	FSBM-5 MINI	FSBM-5H MINI	FSBM-5	FSBM-5H	FSBM-7H	FSBM-9H
Working Width (Feet)	5	5	5 1/2	5 1/2	7	9
Bar Cutting Action	Double	Double	Double	Double	Double	Double
Standard Lift Mechanism	Manual	Hydraulic	Manual	Hydraulic	Hydraulic	Hydraulic
Horsepower Rqmnt.	12-15	12-15	12-15	12-15	20-35	20-35
Transport Width	40"	40"	48"	48"	48"	48"
Weight LBS	441	441	565	565	633	710

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com

FARM-MAXX

Models FHT-280 and FHT-540-H Hay Tedders

Hay Tedders from FORT offer you
the quality and performance you can depend on!



Farm-Maxx Hay Tedder Specifications

Model	FHT-280	FHT-540-H
Work Width	9' 3"	17' 8"
Rotors	2	4
Arms	6	6
Transport Width	5' 8"	9' 4"
Height	4' 11"	11' 7"
Hydraulic Fold	no	yes
Required HP	20	25
Tire Size	15x6.00-6 Balloons	16x6.50 Superballoons
PTO Shaft RPM	540	540
Weight (lbs)	408	1213

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com



WRC-8 and WRC-10 Carted Wheel Rakes

8 and 10 Wheel Carted Rakes from Unifarm offer you the quality and performance you can depend on!



* Optional Kicker Wheel

15" tires and heavy duty 7MM teeth give you the ability to operate at high ground speeds with maximum raking efficiency and ease. A robust double acting hydraulic cylinder with heavy duty double ram design is standard for ease of operations with most tractor hydraulic systems. Each wheel features tapered roller bearings for long trouble free operation. The thick walled square tube frame is built to last for years under the most demanding applications.

Standard Features:

- Heavy Duty Square Tube Frame
- New 205/70-15 Tires
- Heavy Walled Round Tube Rake Frames with Reinforcement Gussets at Key Points
- Cast Steel Hubs with Tapered Roller Bearings
- 7mm Thick Spring Steel Teeth
- Heavy Duty Individual Hydraulic Cylinders
- Powder Coat Paint Finish

Model	WRC-8	WRC-10
Teeth Per Wheel	40	40
Wheel Diameter	55"	55"
Working Width	17'- 7"	21'
Transport Width	8'- 2"	8'- 2"
HP	30	30
Wt. Lbs.	1,324	1,555

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com



HCWR-8, HCWR-10, and HCWR-12 BATRAKES

Farm-Maxx 8, 10 and 12 Wheel High Capacity Rakes Offer You The Quality And Performance You Can Depend On!



15" tires and heavy duty 7MM teeth give you the ability to operate at high ground speeds with maximum raking efficiency and ease. A robust double acting hydraulic cylinder with heavy duty double ram design is standard for ease of operations with most tractor hydraulic systems. Each wheel features tapered roller bearings for long trouble free operation. The thick walled square tube frame is built to last for years under the most demanding applications. Low maintenance and simple design in a powder paint finish.

Features Include:

- 55" Wheels W/7MM Teeth Standard. 60" Wheels W/7.5MM Teeth Optional
- Ground Clearance is 32in.
- Rake Teeth are Made of C85 Steel.
- Optional Center Hydraulically Actuated Kicker Wheel
- Dual Wheel Rake Arms, One Side Raking Possible.
- Hydraulic Folding Raking Arms
- Independent Rake Wheel Arms W/Patented Setting Spring System (Allows Adjustment of Ground Pressure without tools.)
- Easy Windrow Width Adjusting System.

Model	HCWR-8	HCWR-10	HCWR-12
# Wheels	8	10	12
Teeth Per Wheel	40	40	40
Wheel Diameter	55"	55"	55"
Max Working Width	18' 5"	21' 8"	24' 3"
Transport Width	9' 2"	9' 2"	9' 2"
Weight LBS	1,387	1,517	1,704

* Uniform reserves the right to change specifications without notice.



For more information contact:
Uniform Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893
Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997
Email: sales@uniform.biz Website: www.uniformmachinery.com

FARM-MAXX

FRM-280 Rotary Rake



Rotary Rake Specifications

Key Features:

- 3-point rotary hay rake
- Long Flexible Tines
- Completely sealed oil-filled gearbox.
- Removeable arms
- Excellent turning radius
- Ballon Tires

Model	FRM-280
Raking Width (ft)	8.5
Working Width (ft)	9.18
Transport Width (ft)	3.28
Total Arms	8
Total Tines	24
Total Height (ft)	5.249
Total Length (ft)	7.545
Optimum HP	20
Optimum PTO Speed	540
Weight (lbs)	700

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com

FARM-MAXX

PT Series Heavy Duty Pull Type Spin Spreaders At last you have a choice!



With two models to choose from, Unifarm's PTSP Pull Type Spreaders offer you rugged construction and ease of operation with "Hook Up and Go" convenience. Easy to access lubrication points, high flotation tires, and heavy duty spun metal hopper mean years of dependable and trouble free performance. "On The Go" application adjustment from the operator post is possible thanks to the heavy duty control cable.

Standard Features Include:

- Adjustable hitch frame for horizontal operation with all hitch configurations
- Decoupling and coupline of transmission from Spinner Disc for work and transport
- Operator Post Mounted Cable Control
- Hitch to fit 2" hitch balls.
- High Flotation 18x9.50 Tires for enhanced flotation and stability

Model	PTSP-430	PTSP-560
Machine Weight (LBS)	300	306
Carrying Capacity (LBS)	900	1,060
Spreading Width Max (Feet)	52	52
Machine Height (Inch)	42.5	51.2
Tire Size	18x9.50	18x9.50
Transmission Couple/Decouple	Yes	Yes
Agitator	Standard	Standard
Cable Control	Yes	Yes

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com

FARM-MAXX

PD Series Pendulum Spreaders Precision Application, Heavy Duty Performance!



Designed and constructed for commercial/professional operations, the PDSP and PDSPC Pendulum Spreaders offer ease of operation, precision material application, and dependable and trouble free service year after year. The penduler distribution system permits easy operator adjustment of the spreading width in the field. Low profile, high strength hoppers assure greater maneuverability while allowing more time in the field and less time traveling and refilling. Backed by Unifarm's "No Nonsense" parts and service support, these machines will perform when and where you need them!

Model	PDSP-500	PDSP-1000	PDSPC-400
Machine Weight (LBS)	287	393	220
Carrying Capacity (LBS)	1,422	2,844	1,098
Spreading Width Max (Feet)	20-40	20-40	20-40
Machine Height (Inch)	39.5	48	46
PTO	1-3/8"	1-3/8"	1-3/8"
Transmission	Pendulum	Pendulum	Pendulum
HP Requirement @ 540RPM	6	6	6
Agitator	Optional	Optional	Not Available
Hydraulic Control Kit	Optional	Optional	Not Available

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com

FARM-MAXX

SP and SPL Series 3 Pt. Spin Spreaders



Precision material application is assured with your Unifarm SP and SPL Series Spin Spreaders. Produced by the recognized world leader in spreader quality and design, these units have been time tested and proven all over the world. Usefull for application of many types of materials these spreaders are used by farmers, landscapers, golf courses, grounds keepers, homeowners and field sportsmen alike.

Standard Features Include:

- High Temperature Epoxy Finish
- Eurocardan Series 1 PTO Shaft
- Optional Stainless Disc With Adjustable Vanes
- Heavy Duty Tubular Steel Chasis
- Standard Rigid Agitator
- Choice of Spun Steel or Polypropylene Hoppers



Model	SP-180	SP-300	SP-500	SPL-180	SPL-400
Machine Weight (LBS)	120	130	140	115	120
Carrying Capacity (LBS)	996	996	996	996	996
Spreading Width Max (Feet)	21 - 60	21 - 60	21 - 60	21 - 60	21 - 60
Machine Height (Inch)	36	40	45	36	45
Hopper Material Type	Spun Steel	Spun Steel	Spun Steel	Polypropylene	Polypropylene
Spreader Disc Material	EP Coated Steel	EP Coated Steel	EP Coated Steel	EP Coated Steel	EP Coated Steel
Rigid Mini-Agitator	Standard	Standard	Standard	Standard	Standard
Spreading Vanes	4	4	4	4	4
Tumble A gitator	Standard	Standard	Standard	Standard	Standard
Salt/Sand Deflector	Optional	Optional	Optional	Optional	Optional
Fertilizer Conveyor 1 or 2 Row	Optional	Optional	Optional	Optional	Optional
Stainless Steel Disc	Standard	Standard	Standard	Standard	Standard



For more information, contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893
 Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997
 Email: sales@unifarm.biz Web Site: www.unifarm.biz

FARM-MAXX

Farm-Maxx Three Point Rotary Cutters Models from 48 inches to 10 Feet!



Standard features include:

- Reinforced Fabricated deck
- Heavy duty pressed pan type stump jumper
- Laminated tailwheel with greasable bearing
- Heavy duty driveline W/Shear Bolt Std.
- Slip Clutch PTO Std. on Larger Models
- Floating Top Hitch
- Dual laminated tail wheel standard on Model Agri-X 84SC
- Std Safety Chains on 84 - 120 Models

Model	Agri-X 4	Agri-X 5	Agri-X 6	Agri-X 6SC	Agri-X 84SC	Agri-X 96	Agri-X 120/PT
Cutting Width	4ft	5 ft	6 ft	6ft	7 ft	8ft	10ft
Cutting Height	2-10 inches				2 to 12 inches		
Hitch	Cat 1, 3 Point, Floating Top				Cat 1, 3 Point, Floating Top		III Or PT
Deck Thickness	11 Gauge				10 gauge		
Gearbox	40HP				80 HP		100 HP
PTO Drive Shaft	Series 4				Series 6		
Driveline Protection	1/2 Shear Bolt			Slip Clutch	Slip Clutch		
Tailwheel	Single Laminated				Double Laminated 14" Tail Wheels		
Tractor HP Range	15-30HP	25 - 35 HP	25 - 45 HP	25-45	50-120HP		
Machine Weight *manuf' Bt.	380	475	601	675	1,095	1,550	2,090

Note: Specifications and pricing subject to change without notice. Shipping weights are approximate and may vary subject to variations in packaging.



For more information, contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Web Site: www.unifarmmachinery.com

FARM-MAXX

Box Blades - Standard & Heavy Duty from Unifarm Machinery Corporation

Quality and Performance You Can Depend On!

Landscaper's Box Blade

- Adjustable Heavy Duty Scarifier Shanks
- Reversible Heat Treated Cutting Edge
- Cat I Three Point Hitch
- Rugged Steel Construction



Model	BB-48	BB-60	BB-72
Working Width (FT)	4	5	7
Side Plate Thickness (Inches)	1/4	1/4	1/4
Hitch - Lift Pin	Cat 1	Cat 1	Cat1
Shanks - Removable	4	5	6
HP Max	40	40	40
Machine Weight (LBS) *manufacuterer's est.	247	375	400

Heavy Duty Box Blade

- Removable Shanks
- Reversible Beveled Cutting Edge
- Rear Reverible Cutting Edge
- Formed Heavy Gauge Mold Board
- Heavy Duty Steel Construction



Model	BB-48HD	BB-60HD	BB-72HD	BB-84HD	BB-96HD
Working Width	4 ft	5 ft	6 ft	7 ft	8 ft
Side Plate Thickness	1/4 "	1/4"	1/4"	1/4"	1/4"
Hitch - Clevis Type	Cat 1	Cat 1	Cat 1-2	Cat 1-2	Cat1-2
Shanks - Removable	4	5	6	7	8
HP Max	40 HP	40 HP	60 HP	75 HP	75 HP
Machine Weight *manufacuterer's est.	405	455	515	617	657

* Unifarm reserves the right to change specifications without notice.



For more information, contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Web Site: www.unifarmmachinery.com



Ground Engaging Equipment from Unifarm Machinery Corporation
offer you the quality and performance you can depend on!

RB Series Rear Grader Blades

<u>Model</u>	<u>Description</u>	<u>Weight</u>
RB-48	48" Working Width	137 lbs
RB-60	60" Working Width	259 lbs
RB-72	72" Working Width	291 lbs
RB96-H	96" Working Width W/Hyd. Tilt and Angle	904 lbs

Standard Features Include:

- 5 Position Tilt and Angle
- Reversible Cutting Edge
- Adjustable Mold Board
- Cat 1 Three Point Hitch



LR Series Landscape Rakes

<u>Model</u>	<u>Description</u>	<u>Weight</u>
LR-48	48" Working Width	172 lbs
LR-60	60" Working Width	190 lbs
LR-72	72" Working Width	210 lbs

Standard Features Include:

- Reversible with Angle Adjustment
- 5 Position Angle Adjustment
- Individually Bolted Heat Treated Tines
- Cat I Three Point Hitch



Farm-Maxx Three Point Hipper/Ripper

<u>Model</u>	<u>Description</u>	<u>Weight</u>
URH-100	3 pt. Row Hipper/Ripper	240 lbs



* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com

FARM-MAX

FLL-60,72,84 Land Leveler

Land Levelers from Unifarm Machinery Corporation offer you the quality and performance you can depend on!



Land Leveler Specifications

Model	Working Width	Overall Width	Weight lbs	Side Panel Height	Side Panel Depth
FLL-60	60"	64"	425	16.5"	55.5"
FLL-72	72"	76"	450	16.5"	55.5"
FLL-84	84"	88"	550	16.5"	55.5"

Key Features:

- 3-point hitch compatible Cat. I
- Replaceable Skids
- Heavy Duty Frame
- Clevic Style Hitch
- Reversible Beveled Blades

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com



Greenscape Conservation Seeders

The Finest MultiTask Landscape Machine Ever Developed!



Machine Features Include:

- Heavy tubular frame construction
- All ground driven, no PTO shaft or gearbox to maintain.
- Precision metering cups with individual clean out gates.
- Perfect pattern across full width of the working area. No row effect as with PTO driven machines.
- Rear roller packer rings to firm and smooth seedbed
- Water tight seed box with agitator shaft - Calibration chart and seeding rate chart
- Driven spoked rollers crumble soil just enough for perfect seed to soil contact.
- Exclusive Torque Arm – keeps constant adjustable down pressure on cultipacker.

Options Available:

- Twin seed boxes for seeding two different types of seed with one pass.
- Additional drive sprocket combinations to achieve any seeding rate desired.

Model	Greenscape 600	Greenscape 840
Hitch	Cat 1 & 2	Cat 1, 2 & 3
Horsepower (Min)	30	50
Working Width (Inches)	60	84
Overall Width (Inches)	73	98
Overall Length (Inches)	67	76
Overall Height (Inches)	48	54
Machine Weight (lbs)	1,420	2,090
Large Seed Box Capacity	3 1/2 Bushels	8 1/4 Bushels
Legume Seed Box Capacity	1 1/2 Bushels	
Drive System	Ground Engagement	

* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com

FARM-MAXX

Disc Harrows - For Every Pocket Book from Unifarm Machinery Corporation

Quality and Performance You Can Depend On!

DH-100 Compact Tractor Disc Harrow

- High Carbon Welded Steel Frame
- Notched Disc Blades
- 7 1/2" Disc Spacing
- Sealed "Long Life" Ball Bearings
- Swaged and Forged 1" Axles
- Cat. I Three Point Hitch
- Low Profile Gang Hangers



DH-400 Series Disc Harrows

- Tandem Ganges
- Notched Disc Blades
- Category 1 Three Point Hitch
- Angle Position Adjustment with Center Pins
- 7 1/2" Blade Spacing
- "Sealed "Long Life" Ball Bearings
- Cat 1 Three Point Hitch



DH-500 Series Disc Harrows

- Angle Position Adjustment with Center Pins
- 7 1/2 or 9" Blades Available
- Swaged and Forges 1" Axles
- Sealed "Long Life" Ball Bearings
- Gang Arms Made of High Stress Tubing to Prevent twisting



Model	DH100-1216	DH41618	DH42018	DH52020	DH52020-9
Working Width (Feet)	4 1/2	5 1/2	6 1/2	6 1/2	7 1/2
Hitch Cat.	Cat I	Cat I/II	Cat I/II	Cat I/II	Cat I/II
# Blades	12	16	20	20	22
Blade Size (inches)	16	18	18	20	20
Approximate Weight (LBS)	375	625	725	1,000	1,050
Disc Spacing (inches)	7 1/2	7 1/2	7 1/2	7 1/2	9"

* Unifarm reserves the right to change specifications without notice.



For more information, contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Web Site: www.unifarmmachinery.com



Farm-Maxx FRG Series Root Grapple

54"- 60"- 66"- 72" ROOT GRAPPLES



Standard Features Include:

- AR400 Abrasion Resistant Steel
- Dual Cylinders on 60", 66", 72"
- Quick Attach Compatible
- 1/2" Male & Female Quick Connectors Included
- Tuff-Flex® Protective Hose Sleeve Standard

Model	FRG-54	FRG-60	FRG-66	FRG-72
Grapple Width	37.4" (949 mm)	47.6" (1210 mm)	51.7" (1314 mm)	57.8" (1467 mm)
Width	54" (1372 mm)	60" (1528 mm)	66" (1676.6 mm)	72" (1829 mm)
Overall Height	28.9" (733 mm)	28.9" (733 mm)	28.9" (733 mm)	28.9" (73 mm)
Grapple Opening	33" (813 mm)	33" (813 mm)	33" (813 mm)	33" (813 mm)
Teeth No.	6	8	8	9
Cylinder(s)	Single	Double	Double	Double
Weight	315lb	359lb	380lb	401lb



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893
Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997
Email: sales@unifarm.biz Website: www.unifarmmachinery.com



Farm-Maxx FRKG Rake Grapple

60"- 66"- 72" ROOT GRAPPLES



Farm-Maxx FRKG Rake Grapple.

Rake it, pick it up, and move it where you need it. Superior design and heavy duty hydraulics assure many years of trouble free service.

Standard Features Include:

- Heavy Duty Dual Hydraulic Cylinders
- 1/2" Male & Female Quick Connectors
- Quick Attached Mounting System
- 6' hoses with Hose Protectors
- Greasable Pins with Protected Fittings

Optional

- Flat Face Fittings



Model	FRKG-60	FRKG-66	FRKG-72
Grapple Width	55.9" (1420mm)	61.4" (1560mm)	67.2" (1707mm)
Overall Width	60.6" (1539mm)	66.1" (1679mm)	72" (1829mm)
Overall Height	27.7" (704mm)	32.9" (836mm)	33.1" (841mm)
Grapple Opening	41.8" (1062mm)	47.3" (1201.4mm)	47.6" (1209mm)
Top/Bottom Teeth	7/8	7/8	8/9
Cylinders	Double	Double	Double
HP Rating	55	55	55
Weight	381lbs	500lbs	538lbs



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com



Farm-Maxx FRKG-HD Heavy Duty Rake Grapple

62"-68"-74" Heavy Duty Rake Grapples



Standard Features Include:

- Heavy Duty Dual Hydraulic Cylinders
- 1/2" Male and Female Quick Connectors
- Universal Skid Steer Q/A Mounting
- 6' hoses with Hose Protectors
- Greasable Pins with Protected Fittings
- AR400 Abrasion Resistant Steel
- 3/8" Laser Cut Teeth
- Flat Face Fittings Available On Request



Model	FRKG-62HD	FRKG-68HD	FRKG-74HD
Overall Width	62"	68"	74"
Grapple Opening	44"	44"	44"
Teeth Bottom/Top	8/10	8/10	10/12
Cylinders	2.16"x 8"	2.16"x 8"	2.16"x 8"
HP Rating	Up to 60	Up To 70	Up to 80
Hyd. Operating Pres.	3,000	3,000	3,000
Weight (lbs)	471	491	551

For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com